

# HP50-ION POWER UNIT

The HP50-ION is part of a comprehensive family of advanced power units from Fraser, which provides high voltage to produce ionisation in Fraser's range of AC static eliminators. There is a model for every customer requirement.

The HP50-ION offers the added benefit of an Iontis performance monitoring system which gives the user live information on the status and efficiency of the system.

## PERFORMANCE

- 6 kV of ionising power.

## ESSENTIAL QUALITIES

- Unique level of local and remote operational feedback.
- Exceeds international safety requirements, with automatic shut-down if there is a short on the static eliminator.
- Low running cost, typically 30 Watts.

## CONNECTIVITY AND CONTROL

- The LED display on the power unit shows:
  - Condition of bars and whether they need cleaning
  - Charge level in material
  - Power ON and high voltage OK
  - Alarm if there is a fault.
- Remote monitoring option provides 24 V signal for each of the above.

## APPLICATIONS


- The HP50-ION is for static eliminator applications where the operator requires operational feedback and control.
- HP50-ION (Model 3111) may be used to power Fraser EX-1250 Static Eliminators.



## SPECIFICATION

<b>Construction:</b>	Powder coated steel case. Transformer with fully encapsulated windings.
<b>Electrical Output:</b>	6 kV with maximum peak voltage of 7.75 kV. Secondary current limited to 5 mA.
<b>Maximum Load:</b>	30 m of combined Bar and HT Cable.
<b>Safety:</b>	The design is current limited to 5 mA. If more than 5 mA current is drawn the transformer is designed to shut down. Power will restart when the excessive load or fault is removed.
<b>Electrical Input:</b>	115 V or 230 V, 50 or 60 Hz. Please specify frequency (Hz) as well as input voltage. A 2 m IEC Lead is included.
<b>Environmental:</b>	50 °C maximum temperature. 70 % rH non-condensing max. Location should be dry and oil-free. IP54.
<b>Certification:</b>	CE, CB and UL.
<b>Options:</b>	Remote monitoring to show status of high voltage and bars/electrodes.

CONTROL PANEL

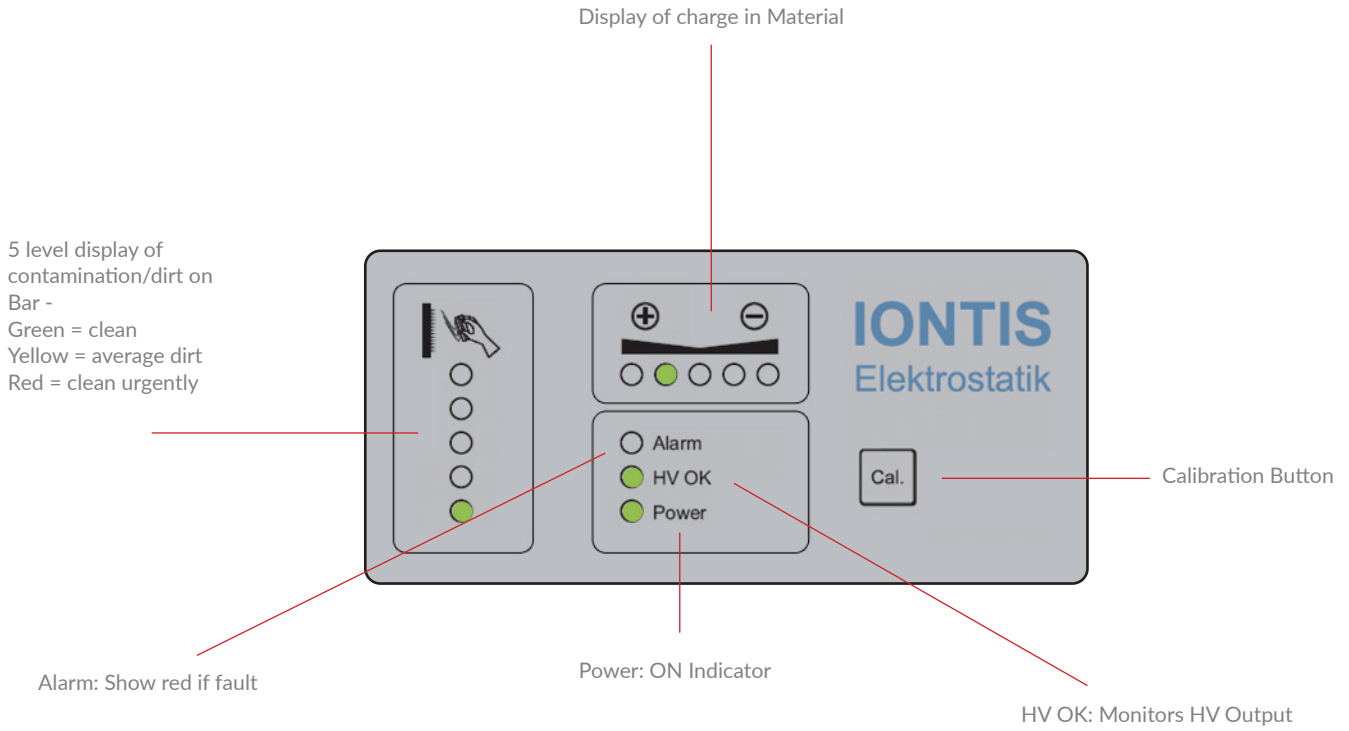

DIMENSIONS

